

## General Specifications

For best traffic calming measures, speed humps should be installed in a series within distances of 200 - 500 feet apart from one another. Traffic Logix rubber speed humps are available in heights of 3" (7' or 10.5' long) or 4" (14' long). Most common lengths are 7' and 14'. Traffic Logix recycled rubber speed humps can be adapted to any road width in increments of 18".

Traffic Logix Speed Humps are constructed of patented 18" wide x 42" long tongue and groove interlocking modules that when joined together form a solid multi-module unit. Each module is bolted into the pavement with 7" rust resistant bolts, washers and special 7" plastic anchors. The tongue and groove modules greatly assist in adding to speed hump stability both during and after installation.

### Unit Specs:

Width	18"
Length	42"
Thickness	3"

### Speed table Specs:

Width	from 84" & up, by 18" increments
Length	from 72" & up by 42" increments
Height	3" or 4"


### Standard Speed Table Specs:

Width	7' or 14'
Length	84"
Height	3" or 4"
Material	100% recycled rubber
Color	Black
Markings	Yellow or white reflective tape
Warranty	2 Years

### Physical properties

Material	100% recycled synthetic and natural rubber composite
Tensile strength	minimum 500 psi
Shore hardness	minimum 70A
Specific gravity	1.1
Markings	rubber modules are available in all black, black with yellow or white reflective square markings, or with white reflective arrow chevrons

- **Standard Cushion sizes:** 7' L x 3" H x various widths in 18" increments 10.5' L x 3" H x various widths in 18" increments 14' L x 4" H x various widths in 18" increments
- **Standard markings:** Markings are embedded into rubber during manufacturing process. Reflective material in Yellow or White Squares Reflective material in White Arrows

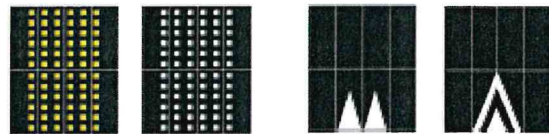

Striping is available in square or arrow patterns and in yellow, white or black (no tape). Please contact us for more information.

