RESERVED FOR CLERK OF SUPERIOR COURT



LOCATION MAP
N.T.S.

CURVE TABLE

CURVE #	CURVE LENGTH	RADIUS	CHD BEARING	CHD LENGTH
C1	19.47'	20.00'	N54° 03' 02"W	18.71'
C2	10.50'	60.00'	N78° 55' 24"W	10.48'
C3	70.70'	60.00'	N38° 09' 14"W	66.68'
C4	71.48'	60.00'	N29° 44' 03"E	67.33'
C5	72.15'	60.00'	S81° 40' 54"E	67.89'
C6	69.96'	60.00'	S13° 49' 15"E	66.07'
C7	10.49'	60.00'	S24° 35' 52"W	10.48'
C8	19.47'	20.00'	S01° 43' 20"W	18.71'
C9	48.72'	175.00'	N55° 51' 38"E	48.56'
C10	73.23'	225.00'	S50° 39' 35"W	72.91'
C11	15.13'	225.00'	S61° 54' 35"W	15.13'

BENCHMARK TABLE - PK NAIL

NAME	ELEVATION	NORTHING	EASTING
BM-1	143.89'	334303.78	2561264.68
BM-2	141.78'	334393.17	2561866.48

LEGEND

IPS ⊕ - IRON PIN SET - 5/8" REBAR WITH CAP #2940
IPF ⊕ - IRON PIN FOUND
CPF ⊕ - GALVANIZED PIPE FOUND
O - NOT MONUMENTED
—R/W— - RIGHT OF WAY
— - CENTERLINE
—x—x—x— - FENCE

EQUIPMENT USED: TOPCON POWER STATION 103 ROBOTIC TOTAL STATION
THE FIELD DATA MEASUREMENTS UPON WHICH THIS PLAT IS BASED WAS MADE USING AN ELECTRONIC TOTAL STATION. REDUNDANT MEASUREMENTS MADE TO THE CONTROL POINTS AND PROPERTY POINTS CORNER MARKERS. BASED UPON THE REDUNDANT MEASUREMENTS THE POSITIONAL TOLERANCE OF THE PROPERTY CORNERS WITH RESPECT TO EACH OTHER WITHIN THE SURVEY IS NOT GREATER THAN 0.25' FOR SUBURBAN SUBDIVISIONS INTERIOR BLOCKS (BOARD RULE 180-7-.03)
METHOD OF ADJUSTMENT: NONE
PLAT CLOSURE: 1' / 140,000,000
BEARINGS SHOWN WERE CALCULATED FROM GRID NORTH, GA WEST ZONE.

PROPERTY INFORMATION

MUNICIPALITY: LOWNDES COUNTY
A PORTION OF MAP 0072/PARCEL 061
LAND LOTS 9 & 10 OF THE 12TH LAND DISTRICT
AND LAND LOT 9 OF THE 11TH LAND DISTRICT
CURRENT ZONING = P-D
TOTAL LOTS = 23 RESIDENTIAL LOTS OF
APPROVED MAXIMUM 123
TOTAL R/W ACREAGE = 1.55 AC.
TOTAL ACREAGE OPEN SPACE = 0.36 AC.
TOTAL ACREAGE = 7.838 AC.
FRONT BUILDING SETBACK = 30'
SIDE BUILDING SETBACK = 10'
REAR BUILDING SETBACK = 25'
CORNER BUILDING SETBACK = 24'
UTILITIES: WATER AND SEWER SERVED BY LOWNDES COUNTY WATER & SEWER.
SUBJECT PROPERTY DEED REFERENCE: DEED BOOK 6590 PG 282.

FLOOD CERTIFICATION

THIS PROPERTY IS LOCATED IN ZONE "X" AND "AE", ACCORDING TO THE FEDERAL EMERGENCY MANAGEMENT AGENCY'S PRELIMINARY FLOOD INSURANCE RATE MAP COMMUNITY-PANEL NUMBER 13185C0115E. THE BASE 100-YEAR FLOOD ELEVATION IS 139.3'. PRELIMINARY DATED: 2021

NOTES:

1. UNLESS OTHERWISE DEPICTED THE ALLOWABLE LAND USES WILL BE SIMILAR TO THOSE LAND USES ALLOWED IN SUBURBAN DENSITY RESIDENTIAL (R-10) ZONING.
2. PROPOSED SUBDIVISION SHALL BE SERVED BY LOWNDES COUNTY WATER & SEWER. WATER, SEWER, AND ALL OTHER UTILITIES SHALL BE CONSTRUCTED IN ACCORDANCE WITH THE STANDARDS AND SPECIFICATIONS OF THE LOWNDES COUNTY TECHNICAL STANDARDS MANUAL.
3. CLUSTER MAILBOXES PROVIDED IN OPEN SPACE 1 AS SHOWN ON RECORDED PLAT IN PLAT CABINET "C" PAGE 1051.
4. ALL RESIDENTIAL LOTS ARE SIZE APPROPRIATELY FOR A HOUSE TO FIT AND SHOULD NOT REQUIRE ADMINISTRATIVE WAIVERS.
5. THE HOME OWNERS ASSOCIATION (HOA) SHALL BE RESPONSIBLE FOR THE MAINTENANCE AND UPKEEP OF THE OPEN SPACE AREAS AS SET FORTH IN THE COVENANTS.
6. TEMPORARY GRAVEL TURN AROUNDS SHALL BE INSTALLED AT THE END OF EACH PHASE.
7. FOR ALL LOTS IN NEW SUBDIVISIONS, THE HOUSES SHOULD BE AT AN ELEVATION THAT ESTABLISHES A MINIMUM GRADE FROM THE FOUNDATION OF THE HOUSE SLOPING AWAY FROM THE HOUSE A MINIMUM OF 6 INCHES OVER 10 FEET.
8. FOR ALL LOTS ADJACENT TO WETLANDS, FLOOD PLAINS, DRAINAGE DITCHES, OR DETENTION PONDS, THE FOLLOWING SHALL BE PROVIDED:
   a. A BENCH MARK SHALL BE ESTABLISHED AT THE FRONT PROPERTY CORNER FOR EVERY LOT.
   b. A HIGH WATER MARK, BASE FLOOD ELEVATION OR HYDRAULIC ANALYSIS PERFORMED SHALL ESTABLISH THE 100 YEAR FLOOD ELEVATION ESTABLISHED.
   c. A MINIMUM FINISHED FLOOR ELEVATION SHALL BE ESTABLISHED FOR THE LOT IN QUESTION A MINIMUM OF 2 FEET ABOVE THE ESTABLISHED 100 YEAR ELEVATION.
   d. A MINIMUM OF TWO SOIL BORINGS ON OPPOSITE SIDES OF THE PROPOSED FOUNDATION SHALL BE COMPLETED TO DETERMINE THE SEASONAL HIGH WATER TABLE.
   e. IF THE SEASONAL HIGH WATER TABLE IS LESS THAN ONE FOOT FROM THE BOTTOM OF THE FOOTER ELEVATION, A SUBSURFACE DRAINAGE SYSTEM SHALL BE DESIGNED BY THE PROFESSIONAL ENGINEER WHO WAS RESPONSIBLE FOR DEVELOPMENT OF THE SUBDIVISION CONSTRUCTION PLANS SHALL BE INSTALLED.
   f. BEFORE ANY INSPECTIONS ARE PERFORMED AND SIGNED OFF ON, A REGISTERED LAND SURVEYOR MUST CERTIFY THAT THE PROPOSED FINISHED FLOOR IS AT OR ABOVE THE MINIMUM FINISHED FLOOR ELEVATION ESTABLISHED ON THE FINAL PLAT.

SURVEYOR'S NOTES:

1. G&L MAKES NO GUARANTEE THAT ALL EXISTING UTILITIES HAVE BEEN IDENTIFIED HEREON, OR THAT UNKNOWN UTILITIES AND/OR EASEMENTS DO NOT EXIST ON SUBJECT PROPERTY.
2. FURTHER, G&L ASSUMES NO LIABILITY RESULTING FROM FAILURE TO CONTACT THE UTILITIES PROTECTION CENTER PRIOR TO ANY ON-SITE DIGGING.
3. HORIZONTAL AND VERTICAL DATA SHOWN ON THIS PLAT WAS OBTAINED IN WHOLE OR PART UTILIZING GPS, INCLUDING CONTROL POINTS AND FOUND AND COMPUTED POINTS. EQUIPMENT USED: SPECTRA PRECISION SP-85 GPS RECEIVER WITH CARLSON SURVEYOR II DATA COLLECTOR RECEIVING RTK CORRECTIONS VIA CELL PHONE FROM THE EGPS SOLUTIONS REAL TIME NETWORK. THE TECHNIQUE USED WAS RTK CORRECTED MEASUREMENTS FROM THE TRIMBLE VRS REAL TIME NETWORK OPERATED BY EGPS SOLUTIONS, INC. THE RELATIVE POSITIONAL ACCURACY OBTAINED ON THE POINTS UTILIZED IN THIS SURVEY WERE (± 0.04 FT. HORIZONTAL AND 0.05 FT. VERTICAL AT THE 95% CONFIDENCE LEVEL).
4. THIS SURVEY WAS PREPARED IN CONFORMITY WITH THE TECHNICAL STANDARDS FOR PROPERTY SURVEYS IN GEORGIA AS SET FORTH IN CHAPTER 180-7 OF THE RULES OF THE GEORGIA BOARD OF REGISTRATION FOR PROFESSIONAL ENGINEERS AND LAND SURVEYORS AND AS SET FORTH IN THE GEORGIA PLAT ACT O.C.G.A. 15-6-67. AUTHORITY O.C.G.A. SECS. 15-6-67, 43-15-4, 43-15-6, 43-15-19, 43-15-22.
5. A CURRENT TITLE SEARCH OR ABSTRACT OF MATTERS AND/OR ITEMS AFFECTING THE SUBJECT PROPERTY HAS NOT BEEN PROVIDED TO THE SURVEYOR ENCUMBRANCES AND/OR LEGAL DOCUMENTS/MATTERS INCLUDING BUT NOT LIMITED TO EASEMENTS, DEEDS, RESTRICTIVE COVENANTS, OR AGREEMENTS WITH OR BETWEEN OTHER PARTIES MAY EXIST BUT ARE NOT SHOWN HEREON.
6. THERE ARE NO DWELLINGS, ACCESSORY BUILDINGS, SEPTIC SYSTEMS, WELLS, SIGNS, OR SWIMMING POOLS LOCATED WITHIN THIRTY (30) FEET OR THE APPLICABLE ZONING SETBACK LINE, WHICHEVER IS GREATER FROM ANY PROPERTY LINE ON THE SITE. (10.02.01(A)(4)).

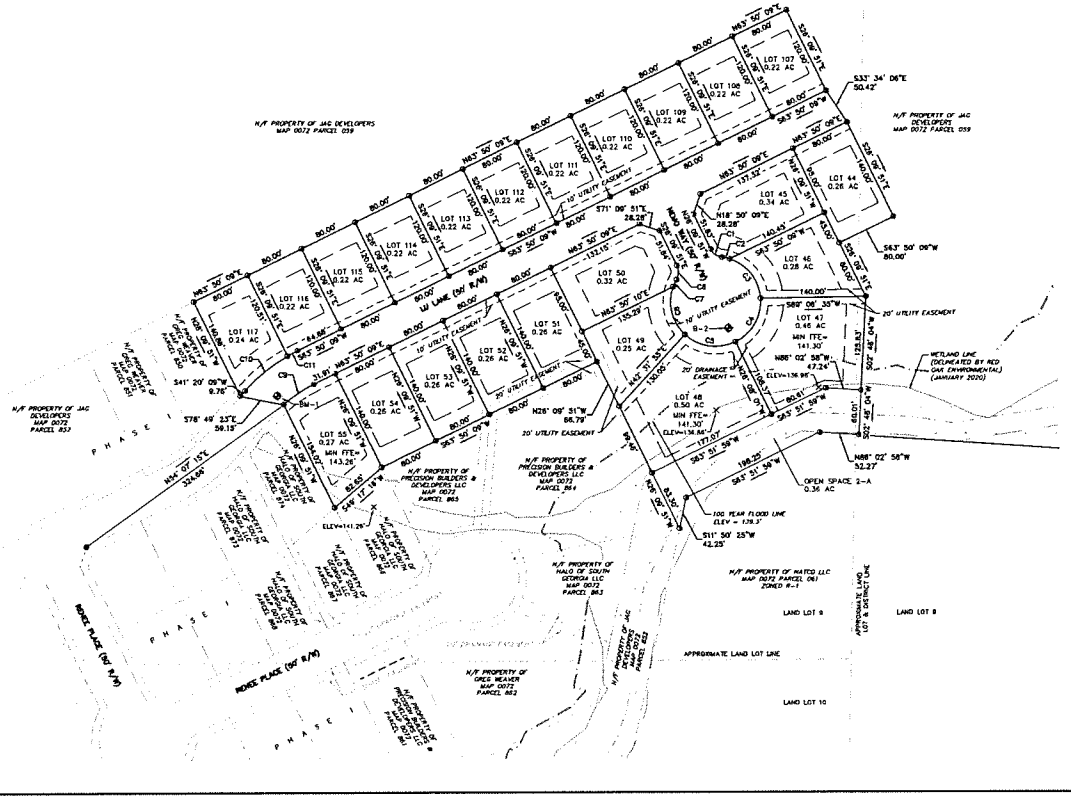
N/F PROPERTY OF JAG DEVELOPERS MAP 0072 PARCEL 039
N/F PROPERTY OF JAG DEVELOPERS MAP 0072 PARCEL 059
LOT 107 0.22 AC
LOT 108 0.22 AC
LOT 109 0.22 AC
LOT 110 0.22 AC
LOT 111 0.22 AC
LOT 112 0.22 AC
LOT 113 0.22 AC
LOT 114 0.22 AC
LOT 115 0.22 AC
LOT 116 0.22 AC
LOT 117 0.24 AC
LOT 44 0.26 AC
LOT 45 0.34 AC
LOT 46 0.28 AC
LOT 47 0.46 AC
LOT 48 0.50 AC
LOT 49 0.25 AC
LOT 50 0.32 AC
LOT 51 0.26 AC
LOT 52 0.26 AC
LOT 53 0.26 AC
LOT 54 0.26 AC
LOT 55 0.27 AC
OPEN SPACE 2-A 0.36 AC
S33° 34' 06"E 50.42'
S63° 50' 09"W 80.00'
N18° 50' 09"E 28.28'
S71° 09' 51"E 28.28'
N63° 50' 09"E 137.32'
S63° 50' 09"W 140.43'
S41° 20' 09"W 9.78'
S78° 49' 33"E 59.15'
N14° 07' 15"W 324.00'
N26° 09' 51"W 86.79'
S11° 50' 25"W 42.25'
N88° 02' 58"W 52.27'
N88° 02' 58"W 47.24'
S02° 48' 04"W 135.83'
S02° 48' 04"W 48.01'
N26° 09' 51"W 86.79'
S63° 51' 56"W 198.25'
S63° 51' 56"W 177.07'
N63° 50' 09"E 140.00'
S63° 50' 09"W 140.00